

# LEJ & LEJA SERIES

## HYDRAULIC-MAGNETIC CIRCUIT BREAKERS

### Introduction

The LEJ/LEJA series circuit breaker meets the evolving demand for the high performance protection of critical data center and telecommunications applications requiring up to 277VAC per pole, UL 489 listing in the smallest case size currently available in the marketplace. The LEJ/LEJA platform is based on the highly successful and field proven LEG/LEGA designs while incorporating state-of-the-art arc quenching technologies and offering voltage ratings that are well suited for global applications that require 208VAC through 277VAC ratings for increased power efficiency.

Typical applications include power distribution units (PDUs) used in data center enclosures, telecom AC power supplies and a variety of Industrial applications benefiting from the higher power density. Like the LEG/LEGA product family, the LEJ/LEJA series offers a variety of features including different terminations and actuators to meet most any requirements.



### Features

- Up to two poles, 2 amps to 20 amps rated current at 240VAC per pole
- UL 489 listed and TÜV approvals available
- Up to 10,000AIC short circuit amperage rating
- Low Depth “A” option provides a 31% lower depth compared to standard LEJ product
- Maintains the high performance characteristics, reliability, panel cut out and mounting dimensions of LEG/LEGA products



### SPECIFICATIONS

Agency Certification	Rated Amperage	Maximum Voltage per Pole	Short Circuit Amperage
UL 489	2 to 20 amps	240 VAC, 50/60 Hz	5000
TÜV (EN60947-2)	2 to 20 amps	240 VAC, 50/60 Hz	5000
UL489	2 to 20 amps	240 VAC, 50/60 Hz	10000
UL489	2 to 20 amps	277 VAC, 50/60 Hz	10000




# CONFIGURATIONS: LEJ TOGGLE HANDLE

## SINGLE POLE

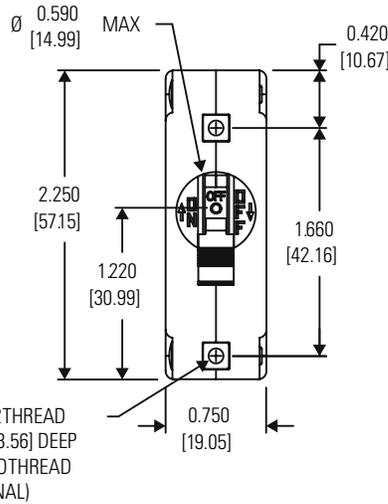
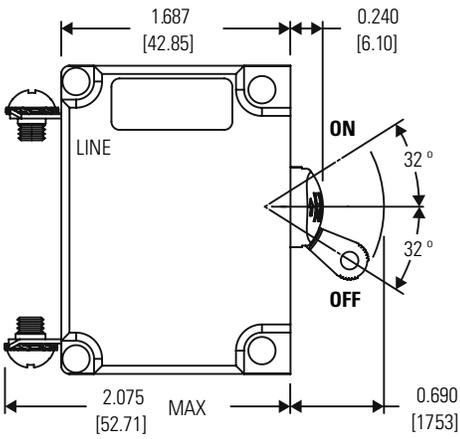


## TWO POLE, 1 HANDLE

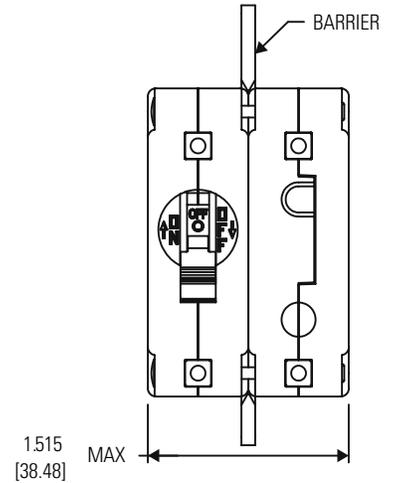


OPTIONAL, HANDLE MAY BE IN POLE 1 INSTEAD OF POLE 2


## TWO POLE, 2 HANDLE

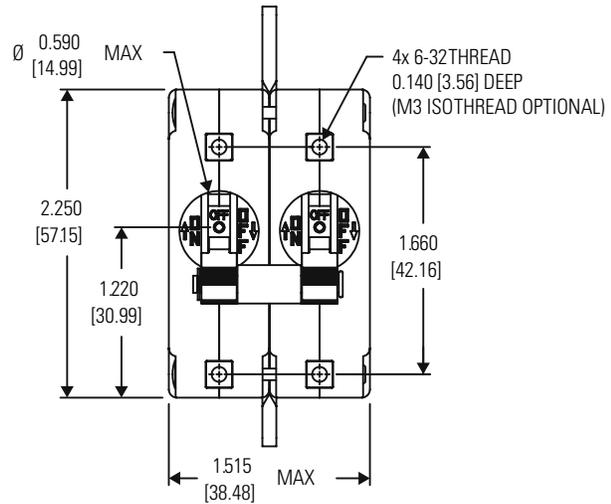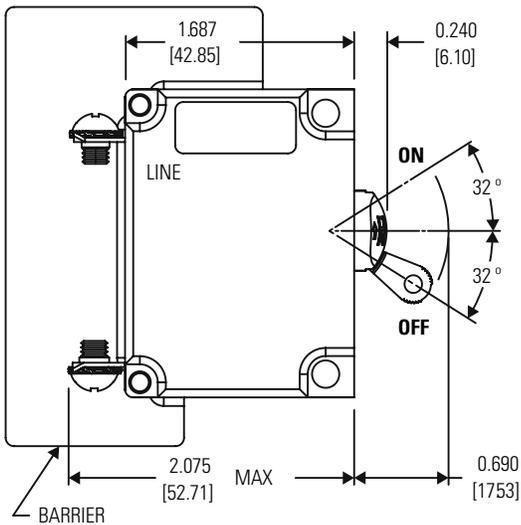


## PANEL MOUNT CUTOUT - 1 POLE

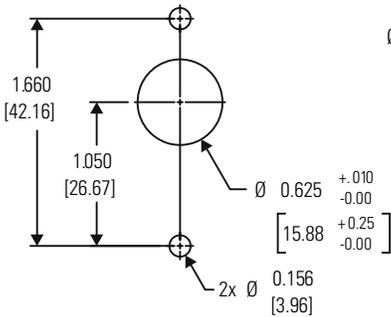

## PANEL MOUNT CUTOUT - 2 POLE, 1 HANDLE

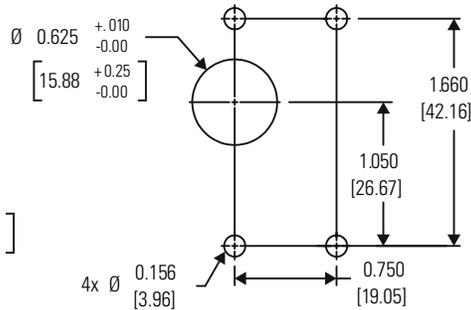

## PANEL MOUNT CUTOUT - 2 POLE, 2 HANDLE

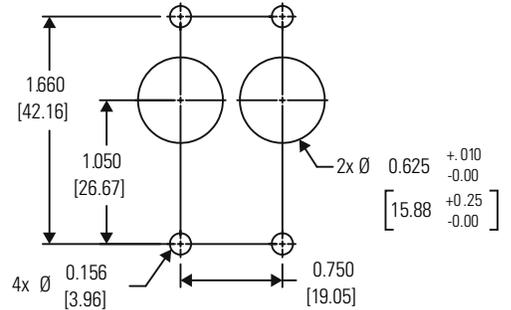



### NOTES:

- All mounting inserts shall be utilized when panel mounting circuit breakers. Panel mounting screws shall have recommended torque applied:  
6 /32 mounting inserts 6 - 8 inch pounds. M3 mounting inserts 4 - 5 inch pounds.
- Panel mounting screws shall not extend beyond back of mounting panel more than specified mounting insert depth.
- Mounting detail tolerance: ± 0.005 [0.13] unless noted.





# CONFIGURATIONS: LEJZX ROCKER HANDLE

## SINGLE POLE

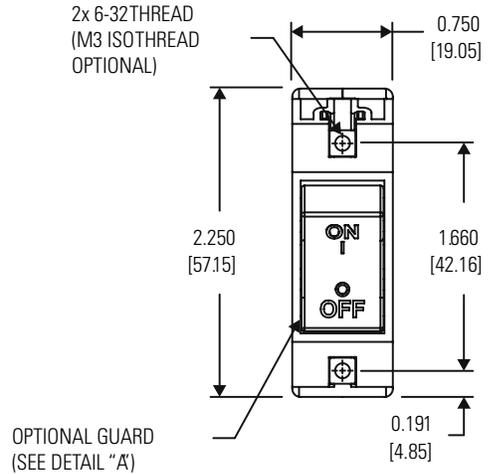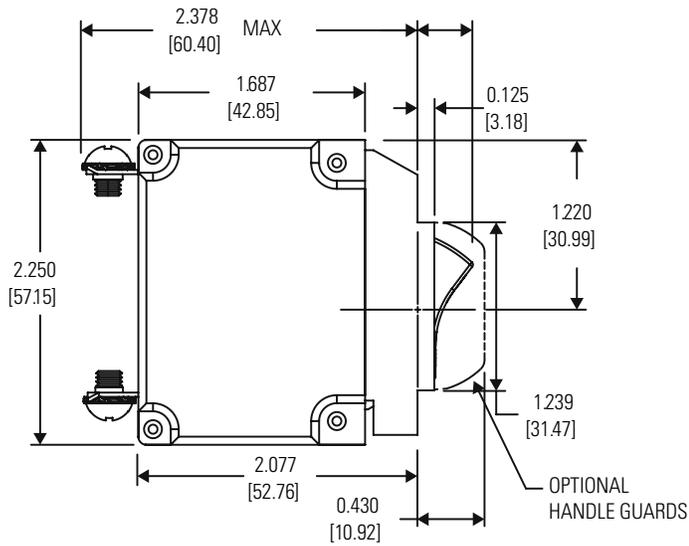


## TWO POLE

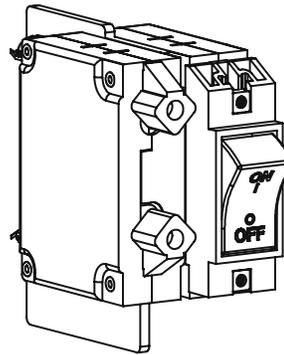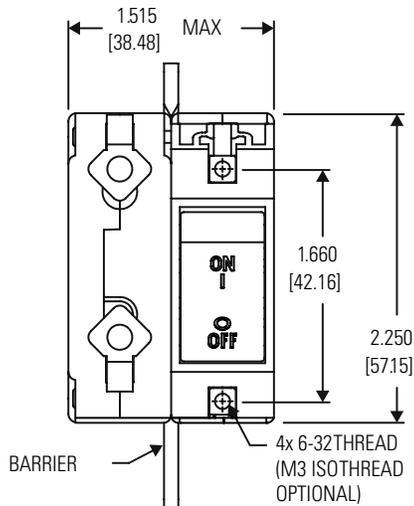

OPTIONAL, HANDLE MAY BE IN POLE 2 INSTEAD OF POLE 1

## PANEL MOUNT CUTOUT - 1 or 2 POLE

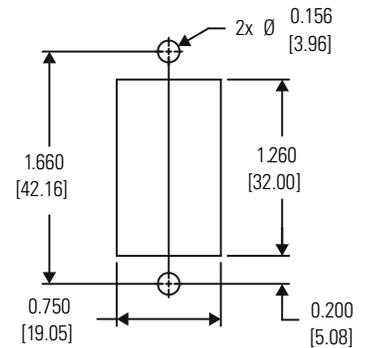


1. All mounting inserts shall be utilized when panel mounting circuit breakers. Panel mounting screws shall have recommended torque applied: 6/32 mounting inserts 6 - 8 inch pounds. M3 mounting inserts 4 - 5 inch pounds.
2. Panel mounting screws shall not extend beyond back of mounting panel more than specified mounting insert depth.
3. Mounting detail tolerance:  $\pm 0.005$  [0.13] unless noted.
4. Two pole ZX has standoffs (as shown). It uses 2 panel screws. A higher shock capability (4 panel screws) is available (consult factory).




# CONFIGURATIONS: LEJBX ROCKER HANDLE


## SINGLE POLE

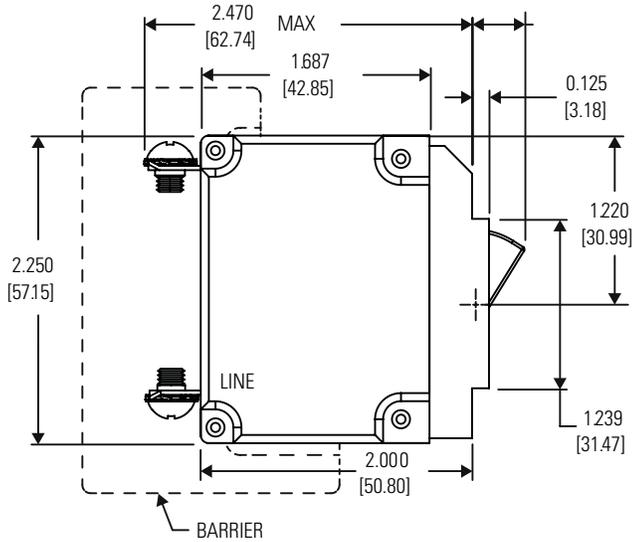


## TWO POLE

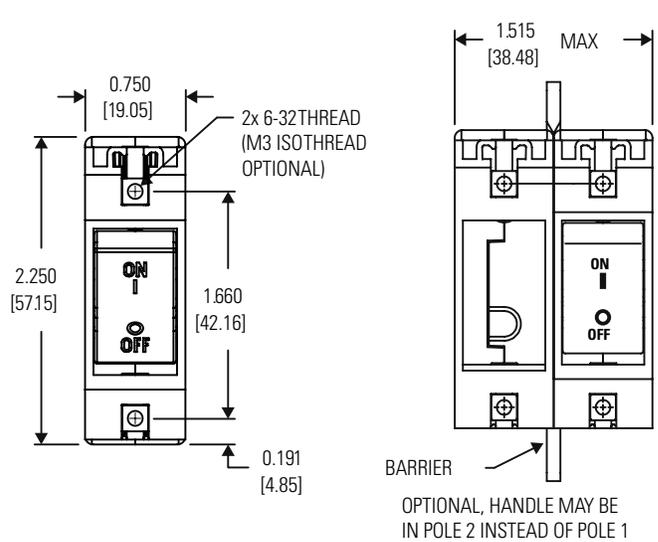

## BX HANDLE WITHOUT GUARD

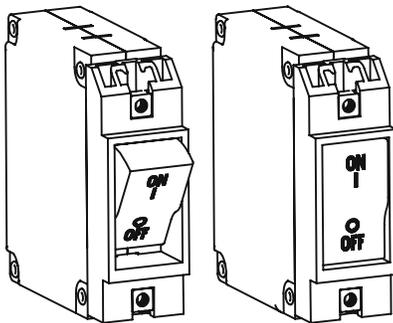


## GUARD (LIMITED ACCESS ACTUATE-OFF)

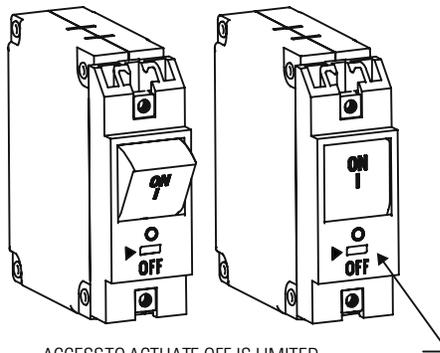


ACCESS TO ACTUATE OFF IS LIMITED TO A DEVICE SMALLER THAN 0.069 [1.75] x 0.155 [3.94]


## PANEL MOUNT CUTOUT (1 POLE)

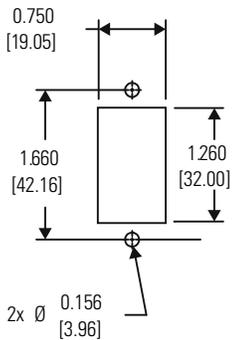

## PANEL MOUNT CUTOUT (2 POLE)

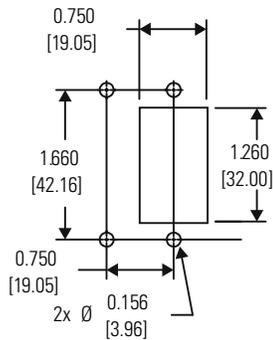


## PANEL PLUG (CONSULT FACTORY FOR AVAILABILITY)

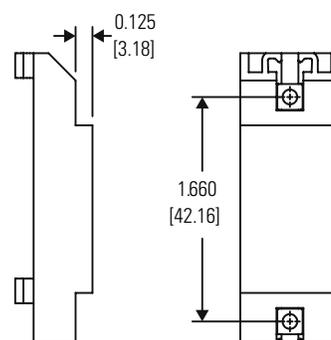


- P/N: 121-710-2450**  
6-32 THD. (BLACK)
- P/N: 121-710-2451**  
M3 THD. (BLACK)
- P/N: 121-450-3000**  
6-32 THD. (BLACK)
- P/N: 121-450-3001**  
M3 THD. (BLACK)




# CONFIGURATIONS: LEJA, TOGGLE HANDLE

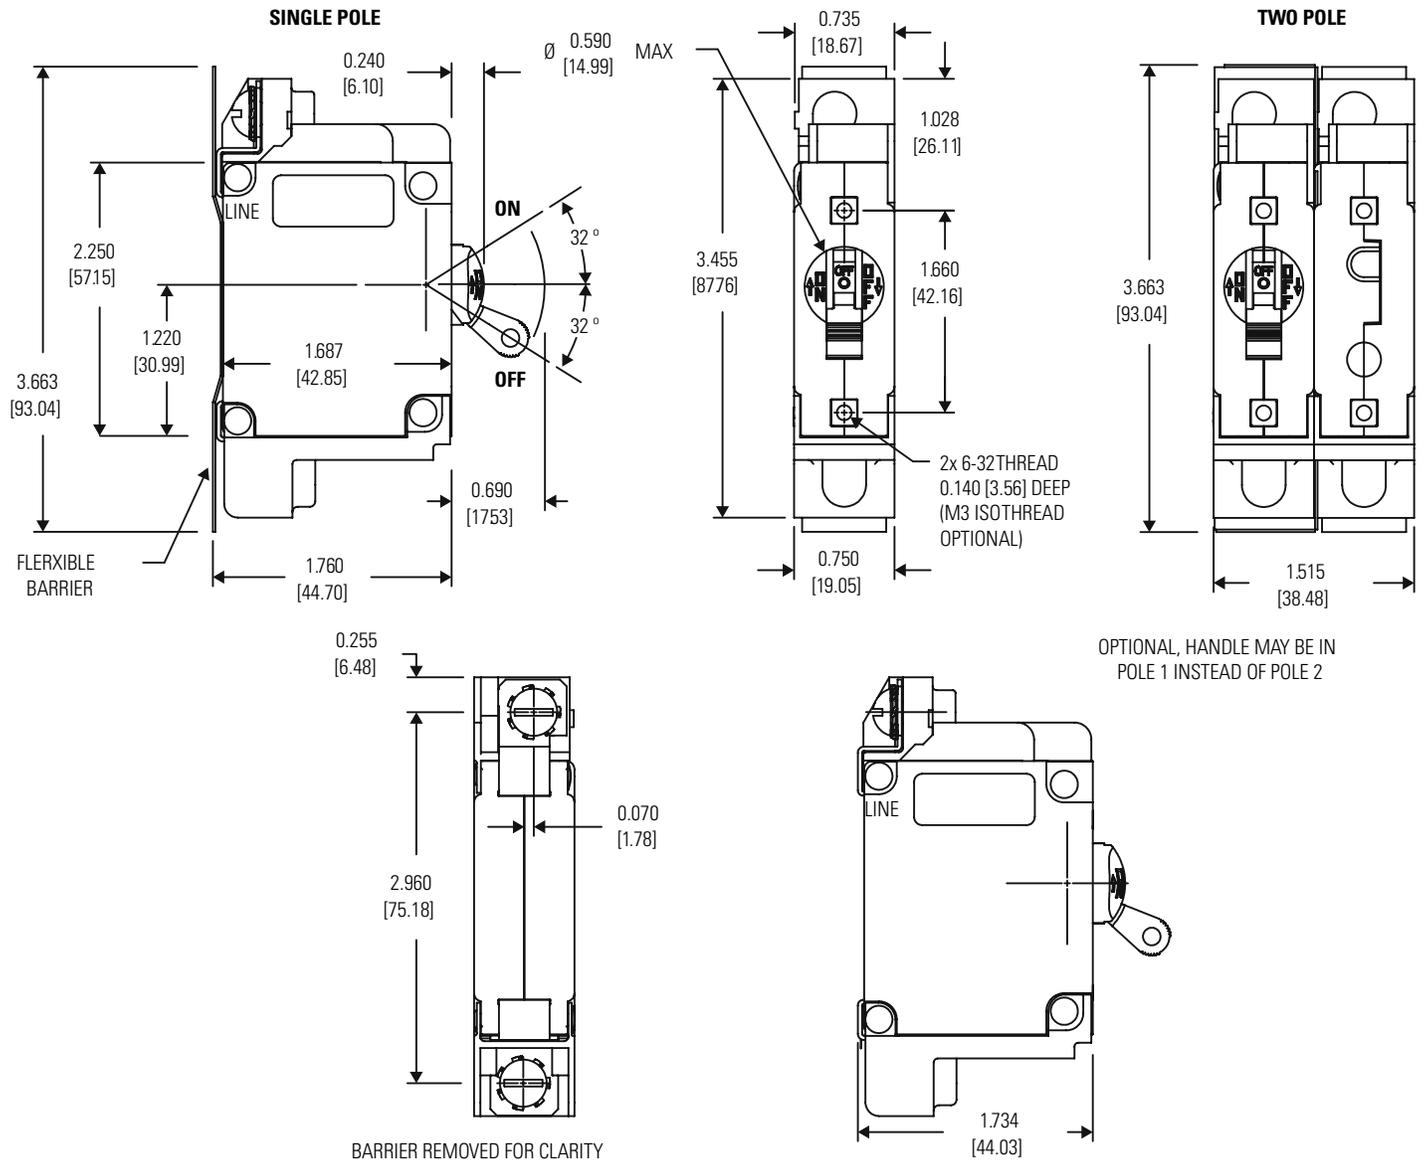

## PANEL MOUNT CUTOUT - 1 POLEP

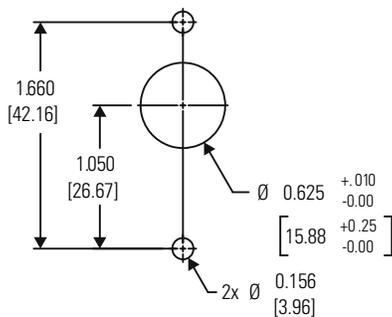

## PANEL MOUNT CUTOUT - 2 POLE, 1 HANDLE


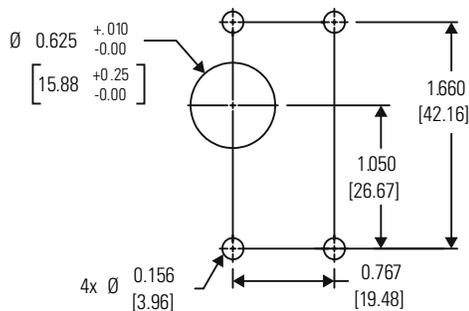


### Notes:


1. All mounting inserts shall be utilized when panel mounting circuit breakers. Panel mounting screws shall have recommended torque applied: 6/32 mounting inserts 6 - 8 inch pounds. M3 mounting inserts 4 - 5 inch pounds.
2. Panel mounting screws shall not extend beyond back of mounting panel more than specified mounting insert depth.
3. Mounting detail tolerance:  $\pm 0.005$  [0.13] unless noted.




# CONFIGURATIONS: LEJBXA ROCKER HANDLE

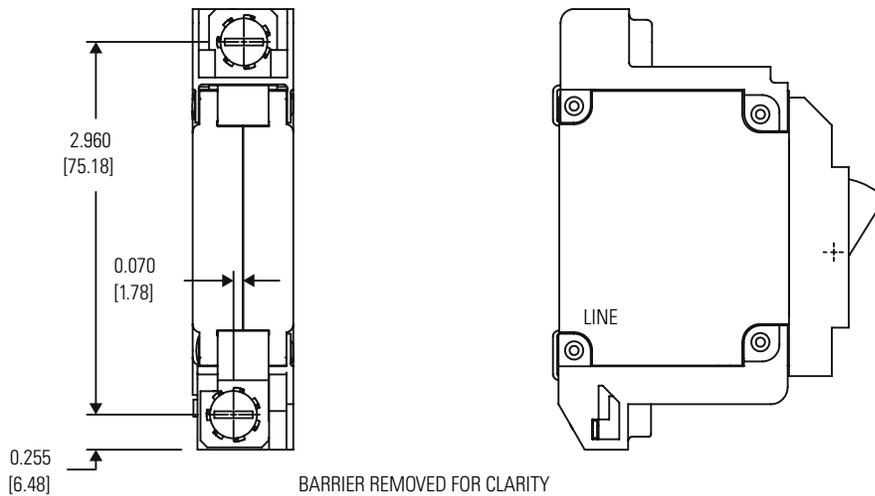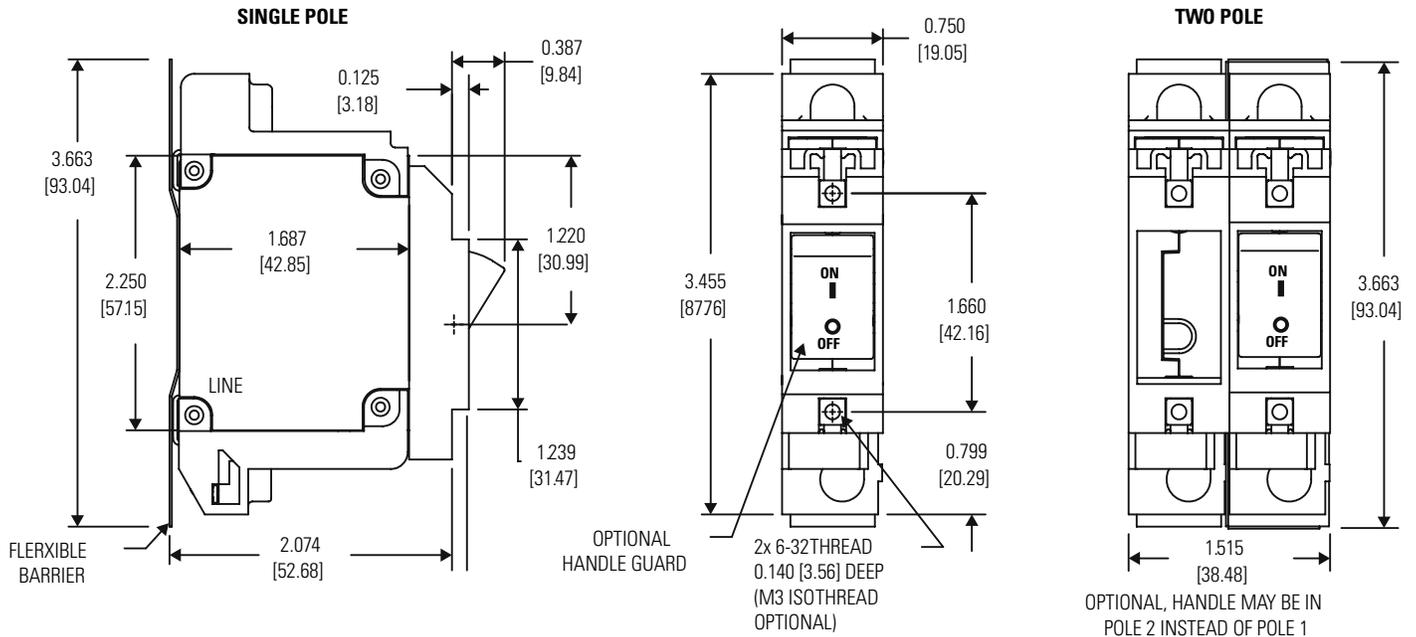

## PANEL MOUNT CUTOUT - 1 POLE

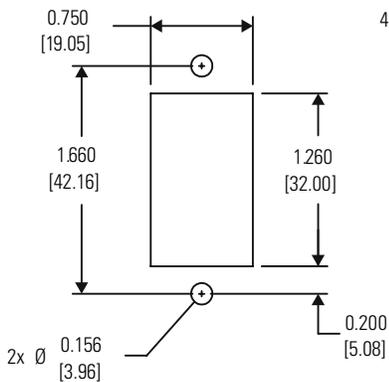

## PANEL MOUNT CUTOUT - 2 POLE





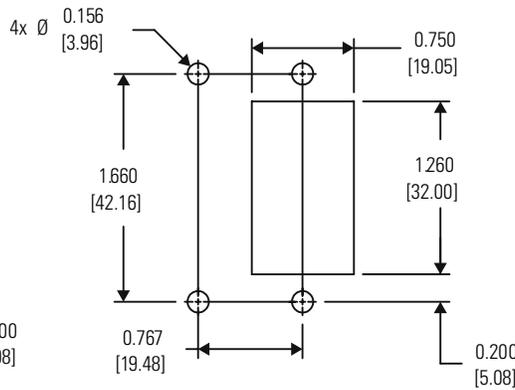


### Notes:


1. All mounting inserts shall be utilized when panel mounting circuit breakers. Panel mounting screws shall have recommended torque applied: 6/32 mounting inserts 6 - 8 inch pounds. M3 mounting inserts 4 - 5 inch pounds.
2. Panel mounting screws shall not extend beyond back of mounting panel more than specied mounting insert depth.
3. Mounting detail tolerance:  $\pm 0.005$  [0.13] unless noted.



# CONFIGURATIONS: LEJZXA, ROCKER HANDLE

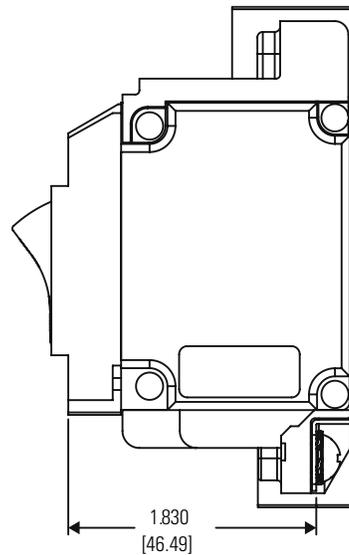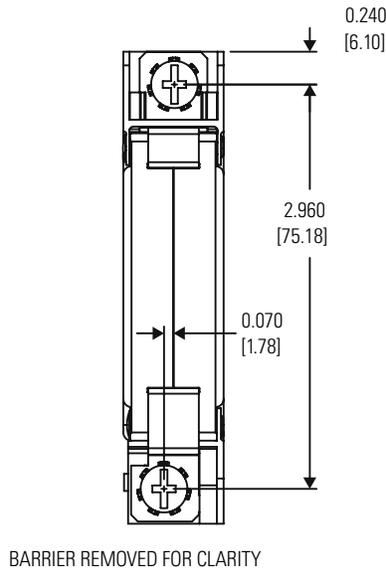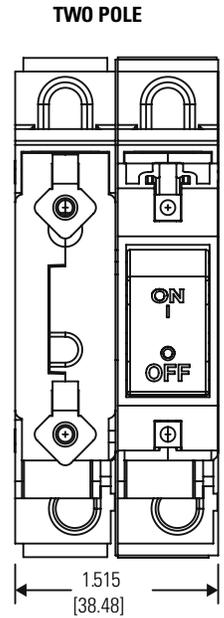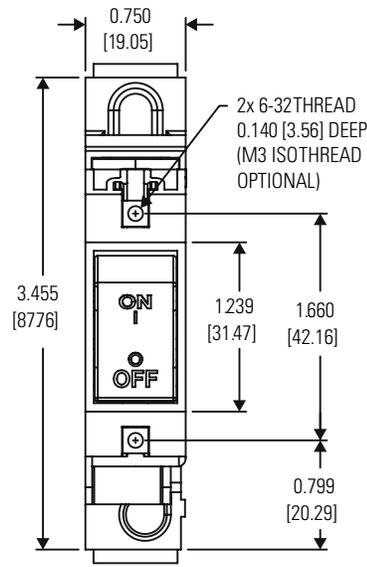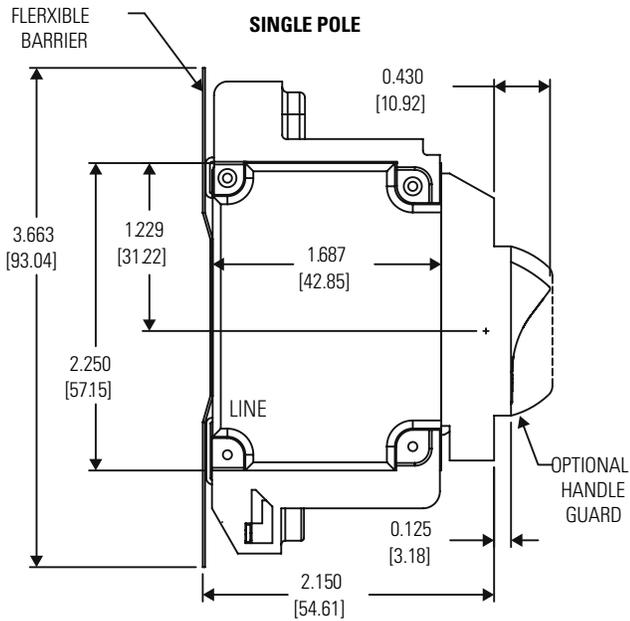


## PANEL MOUNT CUTOUT - 1 POLE

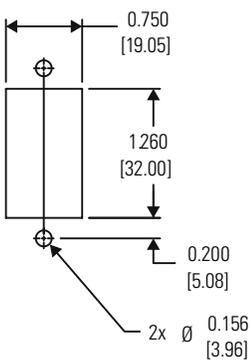

2x STANDARD  
4x HIGHER SHOCK

## PANEL MOUNT CUTOUT - 2 POLE

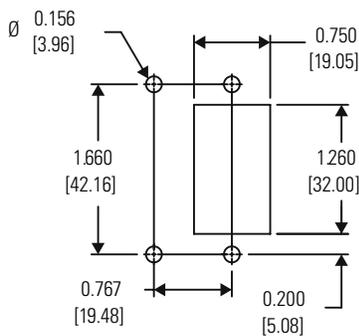


### Notes:

1. All mounting inserts shall be utilized when panel mounting circuit breakers. Panel mounting screws shall have recommended torque applied: 6/32 mounting inserts 6 - 8 inch pounds. M3 mounting inserts 4 - 5 inch pounds.
2. Panel mounting screws shall not extend beyond back of mounting panel more than specified mounting insert depth.
3. Mounting detail tolerance:  $\pm 0.005$  [0.13] unless noted.




# BARRIER OPTIONS FOR MULTI-POLE UNITS


## STANDARD BARRIER - TOGGLE HANDLE

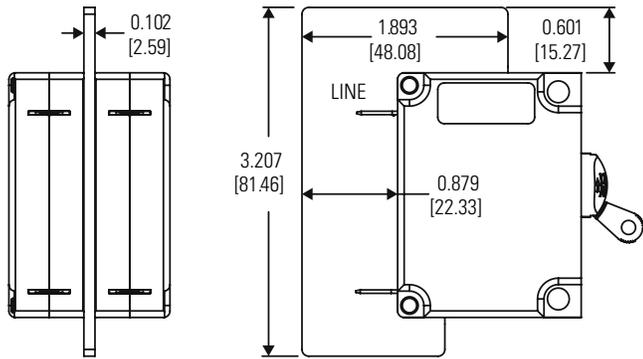


## STANDARD BARRIER - ZX & BX HANDLE

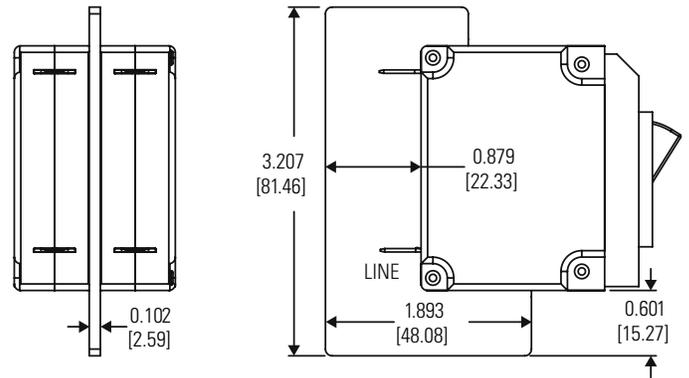

## OPTIONAL (-Z) BARRIER - TOGGLE HANDLE

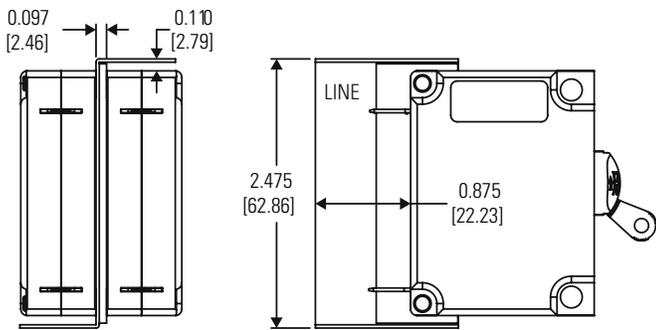


## OPTIONAL (-Z) BARRIER - ZX & BX HANDLE

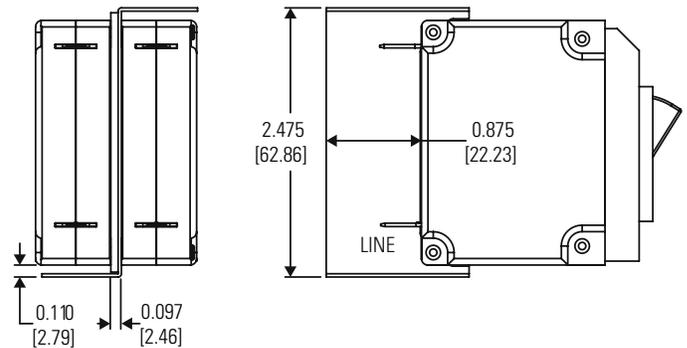


# TERMINAL OPTIONS

## STANDARD - QUICK CONNECT & SCREW TERMINALS

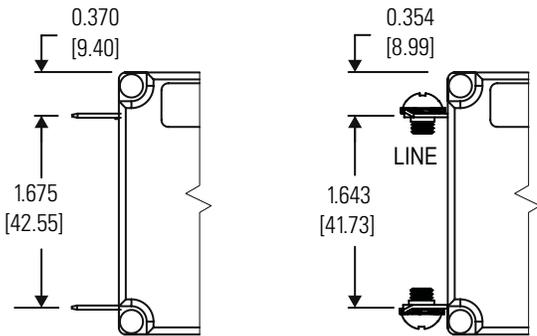

## OPTIONAL - FLAT BUS CONNECT SCREW TERMINAL

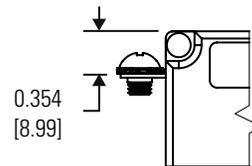


### NOTES:

1. Terminals: Quick Connect = 0.250 [6.35] wide x 0.031 [0.79] thick  
Screw = 10-32 or M5 x 0.8  
TÜV approval with screw terminals include external tooth lockwashers
2. 10000 AIC available only with screw terminals







## OPTIONAL HANDLE LOCK FOR TOGGLE HANDLE

A handle lock option is available to prevent accidental actuation of the handle. The handle lock may be used in the ON or OFF position. This option is available pre-assembled or separately. Consult factory for ordering information.

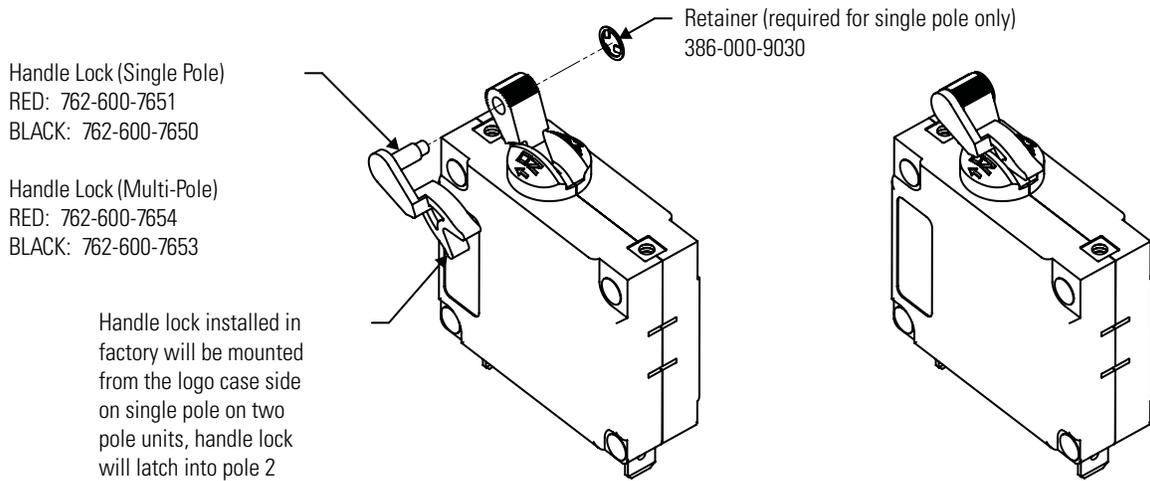

## DELAY CURVES

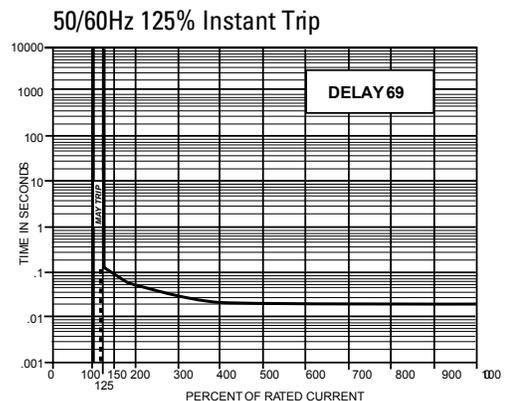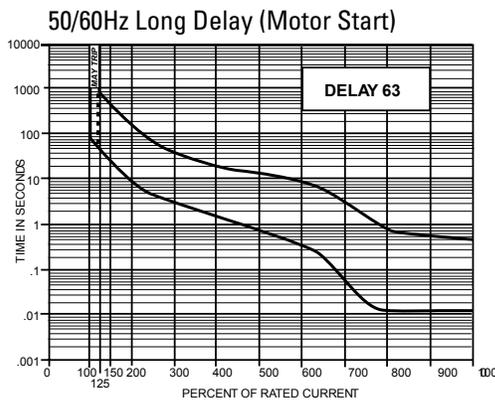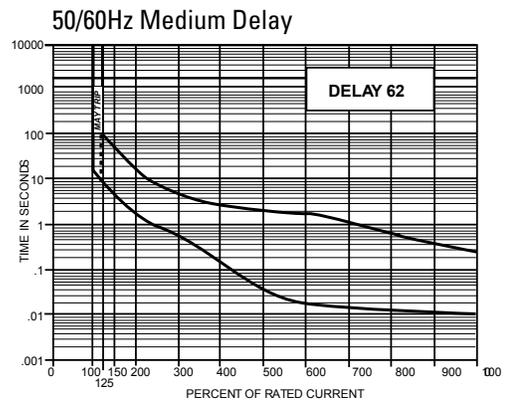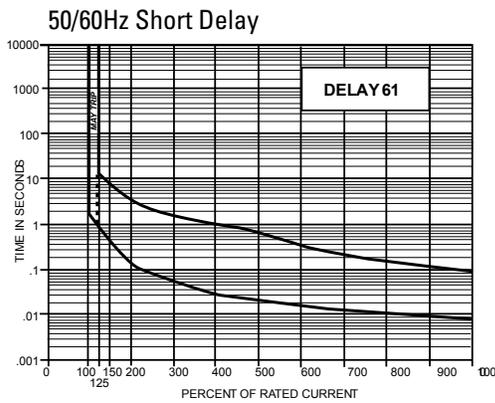



## PERCENTAGE OF RATED CURRENT VS TRIP TIME IN SECONDS

Percentage of Rated Current vs Trip Time in Seconds at +25°C (Vertical Mount)								
Delay	100%	125%	150%	200%	400%	600%	800%	1000%
61	No Trip	.700 to 12	35 to 7.0	.130 to 3.0	030 to 1	.015 to .3	.01 to .15	.008 to .1
62	No Trip	10 to 120	6 to 60	2 to 25	.2 to 3.0	.015 to 2	.015 to .8	.01 to .25
63	No Trip	50 to 700	30 to 400	10 to 150	1.5 to 20	.015 to 10	.013 to .85	.013 to .5
69	No Trip	0.120 max	0.100 max	0.050 max	0.022 max	0.017 max	0.017 max	0.017 max

Inrush Pulse Tolerance	
Delay	Pulse Tolerance
61, 62, 63	10 times rated current (approx)

The table above provides a comparison of inrush pulse tolerance for each of the 50/60Hz delays. Pulse tolerance is defined as a single pulse of half sine wave peak current amplitude of 8 milliseconds duration that will not trip the circuit breaker. Consult Sensata Technologies for further assistance.

Typical Resistance / Impedance	
Current Ratings (Amps)	Impedance
	AC, 50/60Hz (ohms)
	61, 62, 63, 69
2.00	0.29
5.00	0.051
10.0	0.016
20.0	0.006

DCR and Impedance based on 100% rated current applied and stabilized for a minimum of one hour. Tolerance .05-2.5 amperes  $\pm$  20%; 2.6 -20 amperes  $\pm$  25%. Consult factory for special values and for coil impedance of delays not shown.



# ORDERING OPTIONS

**IPAP - 1 - 1REC4 - 61 - 10.0 - L - 01 - T**

## Type & Handle

### Step 1a

**LEJ:** One Handle per Unit, UL 489 Listed, CSA, TÜV\*  
**LEJH:** One Handle per Pole, UL 489 Listed, CSA, TÜV\*  
**LUJ:** One Handle per Unit, UL 489 Listed  
**LUJH:** One Handle per Pole, UL 489 Listed

### Step 1b (optional)

Standard toggle & mounting (no entry, proceed to step 1c)

**BX:** BX at rocker with integral mounting

**ZX:** ZX rocker with integral mounting

### Step 1c (optional)

**F:** Flat bus connect screw terminal (ex. LUJZXF)

**A:** Low depth construction (ex. LEJA)

\* TÜV approval (EN60947-2) requires "T" added to end of part number  
 "ZX" & "BX" versions are single handle construction only. 2-pole units handle may be located on either pole, other than standard handle locations shown. Units must be ordered as non descript part numbers.

## Poles & Terminals

**1:** Single Pole, Quick Connect Terminals

**11:** Two Poles, Quick Connect Terminals

**6:** Single Pole, Screw Terminals\*

**66:** Two Poles, Screw Terminals\*

\*Screw terminals only for 10KAIC

## Internal Configuration

**1:** Series

## Frequency & Delay

**61:** 50/60Hz short delay

**62:** 50/60Hz Medium Delay

**63:** 50/60Hz Long Delay (Motor Start)

**69:** 50/60Hz 125% Instant Trip

## Rated Current

Use three numbers in build (2.00 or 15.0 or 20.0) Required value between

**2.00** amps minimum and

**20.0** amps maximum, full integers only (specials available upon request)

## Additional Options

**A:** Metric thread mounting inserts and terminal hardware

**G:** Handle guard w/ limited access (available for ZX & BX versions only)

**M:** Handle in opposite pole (2-pole only)

**Z:** Optional "Z" barrier (not available on "A" low depth)

**R:** 240VAC, 10KAIC

**E:** 277VAC, 10KAIC

## Handle Colors, Indicators & Markings

### Toggle Handle

Unmarked	Marked ON - OFF I - O	Handle Color		Vertical Mount ON - OFF (g 1)	Vertical Mount I - O (g 2)	Vertical Mount ON - OFF I - O (g 3)	Horizontal Mount ON - OFF (g 4)	Horizontal Mount I - O (g 5)	Horizontal Mount ON - OFF I - O (g 6)	Handle Color	Indicating Color	Marking Color	Indicates
- 00	- 01	Black											
- 40	- 41	Green	<b>ZX Rocker Handle (Two-Color Rocker, Marking Detail "A")</b>	- F1	- F2	- F3	- F4	- F5	- F6	Black	White	White	OFF
- 10	- 11	Yellow		- G1	- G2	- G3	- G4	- G5	- G6	Black	Red	White	OFF
- 60	- 61	Orange											
- 20	- 21	Red	<b>BX Rocker Handle (Two-Color Rocker, Marking Detail "A")</b>	-	-M2	-M3	-	-	-M6	Black	White	White	OFF
- 90	- 91	White		-	-N2	-N3	-	-	-N6	Black	Red	Red	OFF
- 30	- 31	Blue											

For BX: Bezel of BX is black. BX markings are same color as indicating color. Consult factory for other marking options.

For ZX: Black, red, blue and green handles have white marking. White, yellow and orange handles have black marking.

Note, these are just a few of the options/orientations/colors available, please consult the factory for additional information.



MARKING DETAIL "A"

NOTE: "ON" actuates towards the "up" and "right" direction

## Agency Approval

**T:** TÜV approved Certified to EN60947-2 Includes the CE mark



## WARNINGS



### RISK OF MATERIAL DAMAGE AND HOT ENCLOSURE

- The product's side panels may be hot, allow the product to cool before touching
- Follow proper mounting instructions including torque values
- Do not allow liquids or foreign objects to enter this product

**Failure to follow these instructions can result in serious injury, or equipment damage.**



### HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH

- Disconnect all power before installing or working with this equipment
- Verify all connections and replace all covers before turning on power

**Failure to follow these instructions can result in death or serious injury.**

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at [www.sensata.com](http://www.sensata.com) SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

## CONTACT US

### Americas

508-236-2551  
electrical-protection-sales@  
sensata.com

### Europe, Middle East & Africa

+31743578156  
info-sse@list.sensata.com

### Asia Pacific

sales.isasia@list.sensata.com  
China +86 (21) 2306 1500  
Japan +81 (45) 277 7117  
Korea +82 (31) 601 2004  
India +91 (80) 67920890  
Rest of Asia +886 (2) 27602006  
ext 2808