



ELECTRONICS, INC.
44 FARRAND STREET
BLOOMFIELD, NJ 07003
(973) 748-5089
<http://www.nteinco.com>

NTE4071B & NTE4071BT Integrated Circuit CMOS, Quad 2-Input OR Gate

Description:

The NTE4071B (14-Lead DIP) and NTE4071BT (SOIC-14) are quad 2-input OR gate devices constructed with P-Channel and N-Channel enhancement mode devices in a single monolithic structure. These complementary MOS logic gates find primary use where low power dissipation and/or high noise immunity is desired.

Features:

- Supply Voltage Range: 3Vdc to 18Vdc
- All Outputs Buffered
- Capable of Driving Two Low-Power TTL Loads or One Low-Power Schottky TTL Load Over the Rated Temperature Range
- Double Diode Protection on All Inputs

Absolute Maximum Ratings: (Voltages referenced to V_{SS}, Note 1)

DC Supply Voltage, V _{DD}	-0.5 to +18.0V
Input Voltage (DC or Transient), V _{in}	-0.5 to V _{DD} to +0.5V
Output Voltage (DC or Transient), V _{out}	-0.5 to V _{DD} to +0.5V
Input Current (DC or Transient, Per Pin), I _{in}	±10mA
Output Current (DC or Transient, Per Pin), I _{out}	±10mA
Power Dissipation (Per Package), P _D	500mW
Temperature Derating (from +65° to +125°C)	-7.0mW/°C
Storage Temperature, T _{stg}	-65° to +150°C
Lead Temperature (During Soldering, 8sec max), T _L	+260°C

Note 1. Maximum Ratings are those values beyond which damage to the device may occur.

Electrical Characteristics: (Voltages referenced to V_{SS}, Note 2)

Parameter	Symbol	V _{DD} Vdc	−55°C		+25°C			+125°C		Unit	
			Min	Max	Min	Typ	Max	Min	Max		
Output Voltage V _{in} = V _{DD} or 0	V _{OL}	5.0	—	0.05	—	0	0.05	—	0.05	Vdc	
		10	—	0.05	—	0	0.05	—	0.05	Vdc	
		15	—	0.05	—	0	0.05	—	0.05	Vdc	
	V _{OH}	5.0	4.95	—	4.95	5.0	—	4.95	—	Vdc	
		10	9.95	—	9.95	10	—	9.95	—	Vdc	
		15	14.95	—	14.95	15	—	14.95	—	Vdc	
Input Voltage (V _O = 4.5 or 0.5Vdc) (V _O = 9.0 or 1.0Vdc) (V _O = 13.5 or 1.5Vdc)	V _{IL}	5.0	—	1.5	—	2.25	1.5	—	1.5	Vdc	
		10	—	3.0	—	4.50	3.0	—	3.0	Vdc	
		15	—	4.0	—	6.75	4.0	—	4.0	Vdc	
	V _{IH}	5.0	3.5	—	3.5	2.75	—	3.5	—	Vdc	
		10	7.0	—	7.0	5.50	—	7.0	—	Vdc	
		15	11.0	—	11.0	8.25	—	11.0	—	Vdc	
Output Drive Current (V _{OH} = 2.5Vdc) (V _{OH} = 4.6Vdc) (V _{OH} = 9.5Vdc) (V _{OH} = 13.5Vdc)	Source	I _{OH}	5.0	−3.0	—	−2.4	−4.2	—	−1.7	—	mAdc
			5.0	−0.64	—	−0.51	−0.88	—	−0.36	—	mAdc
			10	−1.6	—	−1.3	−2.25	—	−0.9	—	mAdc
			15	−4.2	—	−3.4	−8.8	—	−2.4	—	mAdc
	Sink	I _{OL}	5.0	0.64	—	0.51	0.88	—	0.36	—	mAdc
			10	1.6	—	1.3	2.25	—	0.9	—	mAdc
			15	4.2	—	3.4	8.8	—	2.4	—	mAdc
Input Current	I _{in}	15	—	±0.1	—	±0.00001	±0.1	—	±0.1	μAdc	
Input Capacitance (V _{IN} = 0)	C _{in}	—	—	—	—	5.0	7.5	—	—	pF	
Quiescent Current (Per Package)	I _{DD}	5.0	—	0.25	—	0.0005	0.25	—	7.5	μAdc	
		10	—	0.5	—	0.0010	0.5	—	15	μAdc	
		15	—	1.0	—	0.0015	1.0	—	30	μAdc	
Total Supply Current (Dynamic plus Quiescent, Per Gate, C _L = 50pF, Note 3, Note 4)	I _T	5.0	I _T = (0.3μA/kHz) f + I _{DD} /N						—	μAdc	
		10	I _T = (0.6μA/kHz) f + I _{DD} /N						—	μAdc	
		15	I _T = (0.8μA/kHz) f + I _{DD} /N						—	μAdc	

Note 2. Data labeled "Typ" is not to be used for design purposes but is intended as an indication of the device's potential performance.

Note 3. The formulas given are for the typical characteristics only at +25°C.

Note 4. To calculate total supply current at loads other than 50pF:

$$I_T(C_L) = I_T(50\text{pF}) + (C_L - 50) V_{fk}$$


where: I_T is in μH (per package), C_L in pF, V = (V_{DD} − V_{SS}) in volts, f in kHz is input frequency, and k = 0.001 × the number of exercised gates per package.

Switching Characteristics: ($C_L = 50\text{pF}$, $T_A = +25^\circ\text{C}$, Note 2)



Parameter	Symbol	V_{DD} V_{dc}	Min	Typ	Max	Unit
Output Rise Time $t_{TLH} = (1.35\text{ns/pf}) C_L + 33\text{ns}$ $t_{TLH} = (0.60\text{ns/pf}) C_L + 20\text{ns}$ $t_{TLH} = (0.40\text{ns/pf}) C_L + 20\text{ns}$	t_{TLH}	5.0	-	100	200	ns
		10	-	50	100	ns
		15	-	40	80	ns
Output Fall Time $t_{THL} = (1.35\text{ns/pf}) C_L + 33\text{ns}$ $t_{THL} = (0.60\text{ns/pf}) C_L + 20\text{ns}$ $t_{THL} = (0.40\text{ns/pf}) C_L + 20\text{ns}$	t_{THL}	5.0	-	100	200	ns
		10	-	50	100	ns
		15	-	40	80	ns
Propagation Delay Time $t_{PLH}, t_{PHL} = (0.90\text{ns/pf}) C_L + 115\text{ns}$ $t_{PLH}, t_{PHL} = (0.36\text{ns/pf}) C_L + 47\text{ns}$ $t_{PLH}, t_{PHL} = (0.26\text{ns/pf}) C_L + 37\text{ns}$	t_{PLH}, t_{PHL}	5.0	-	160	300	ns
		10	-	65	130	ns
		15	-	50	100	ns

Note 2. Data labeled "Typ" is not to be used for design purposes but is intended as an indication of the device's potential performance.


Note 3. The formulas given are for the typical characteristics only at $+25^\circ\text{C}$.

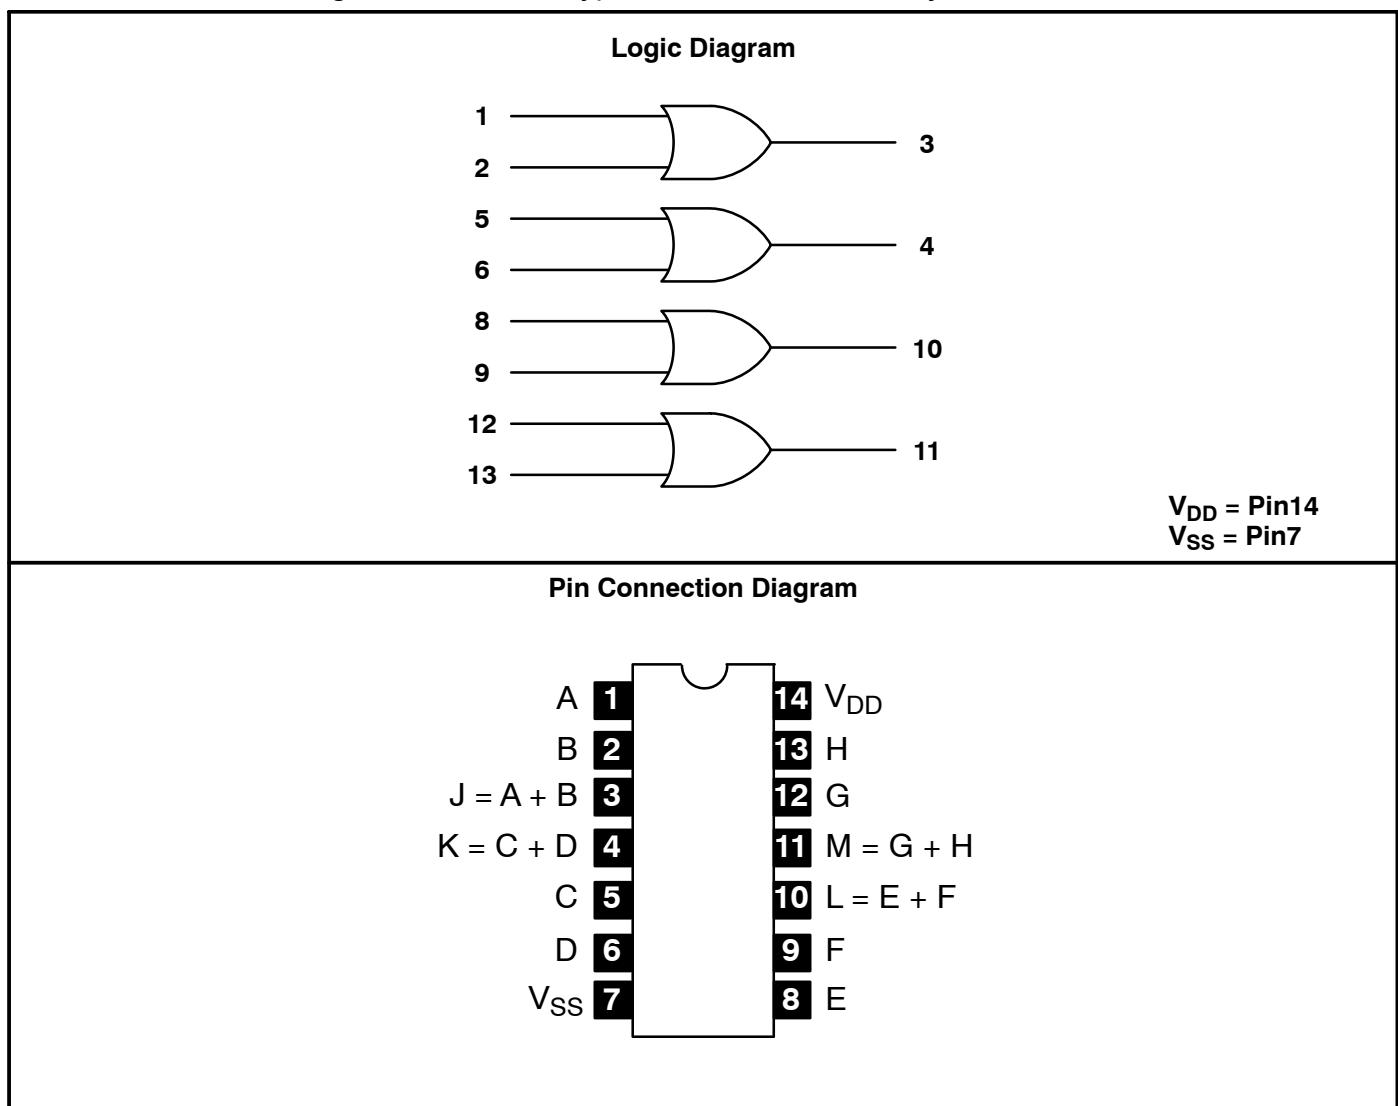

NTE4071B

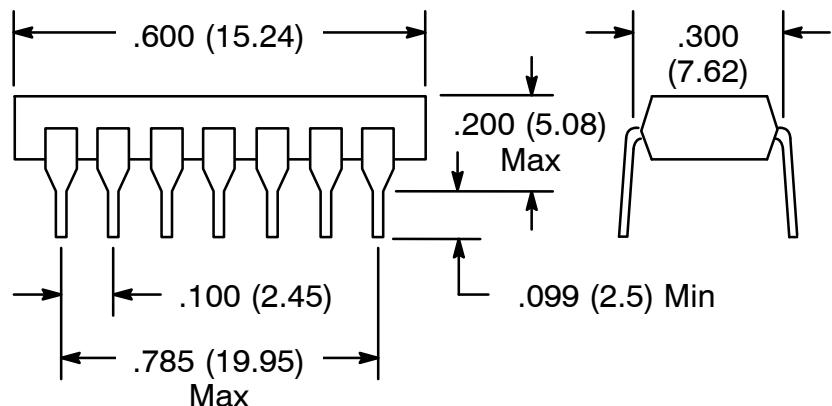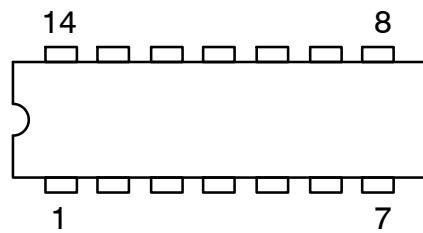

NTE4071BT

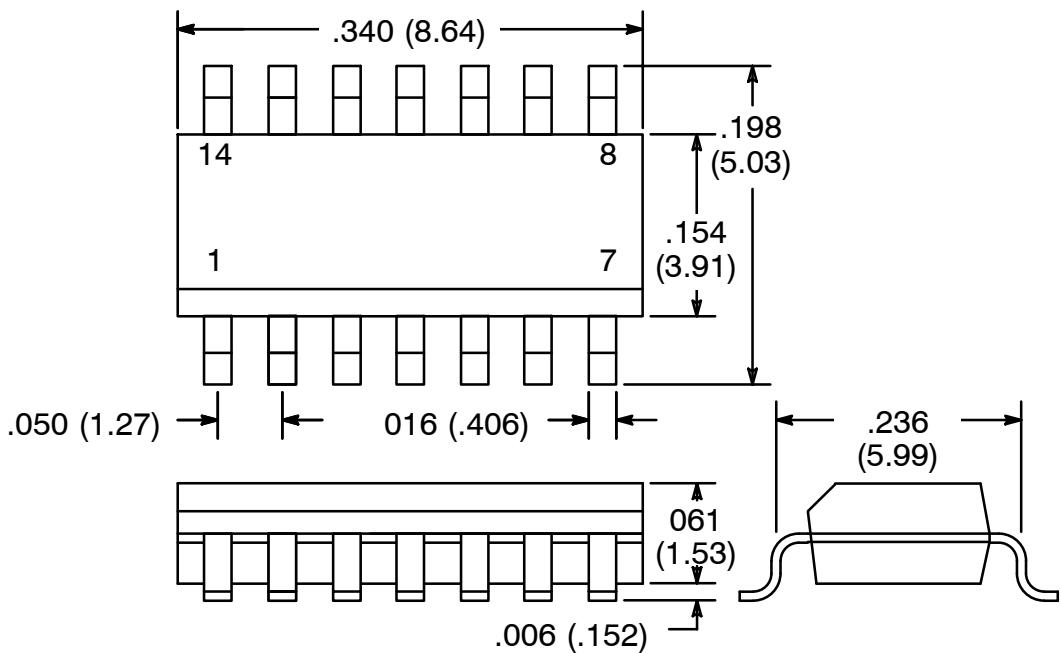

NOTE: Pin1 on Beveled Edge