

POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETIC AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGE INCURRED FROM USE OF SUCH INFORMATION IN


SK6850 REVISION RECORD ECO 25225 **─** 0.735 [18.67] **─** ECO 34678 WHOLE OR IN PART.

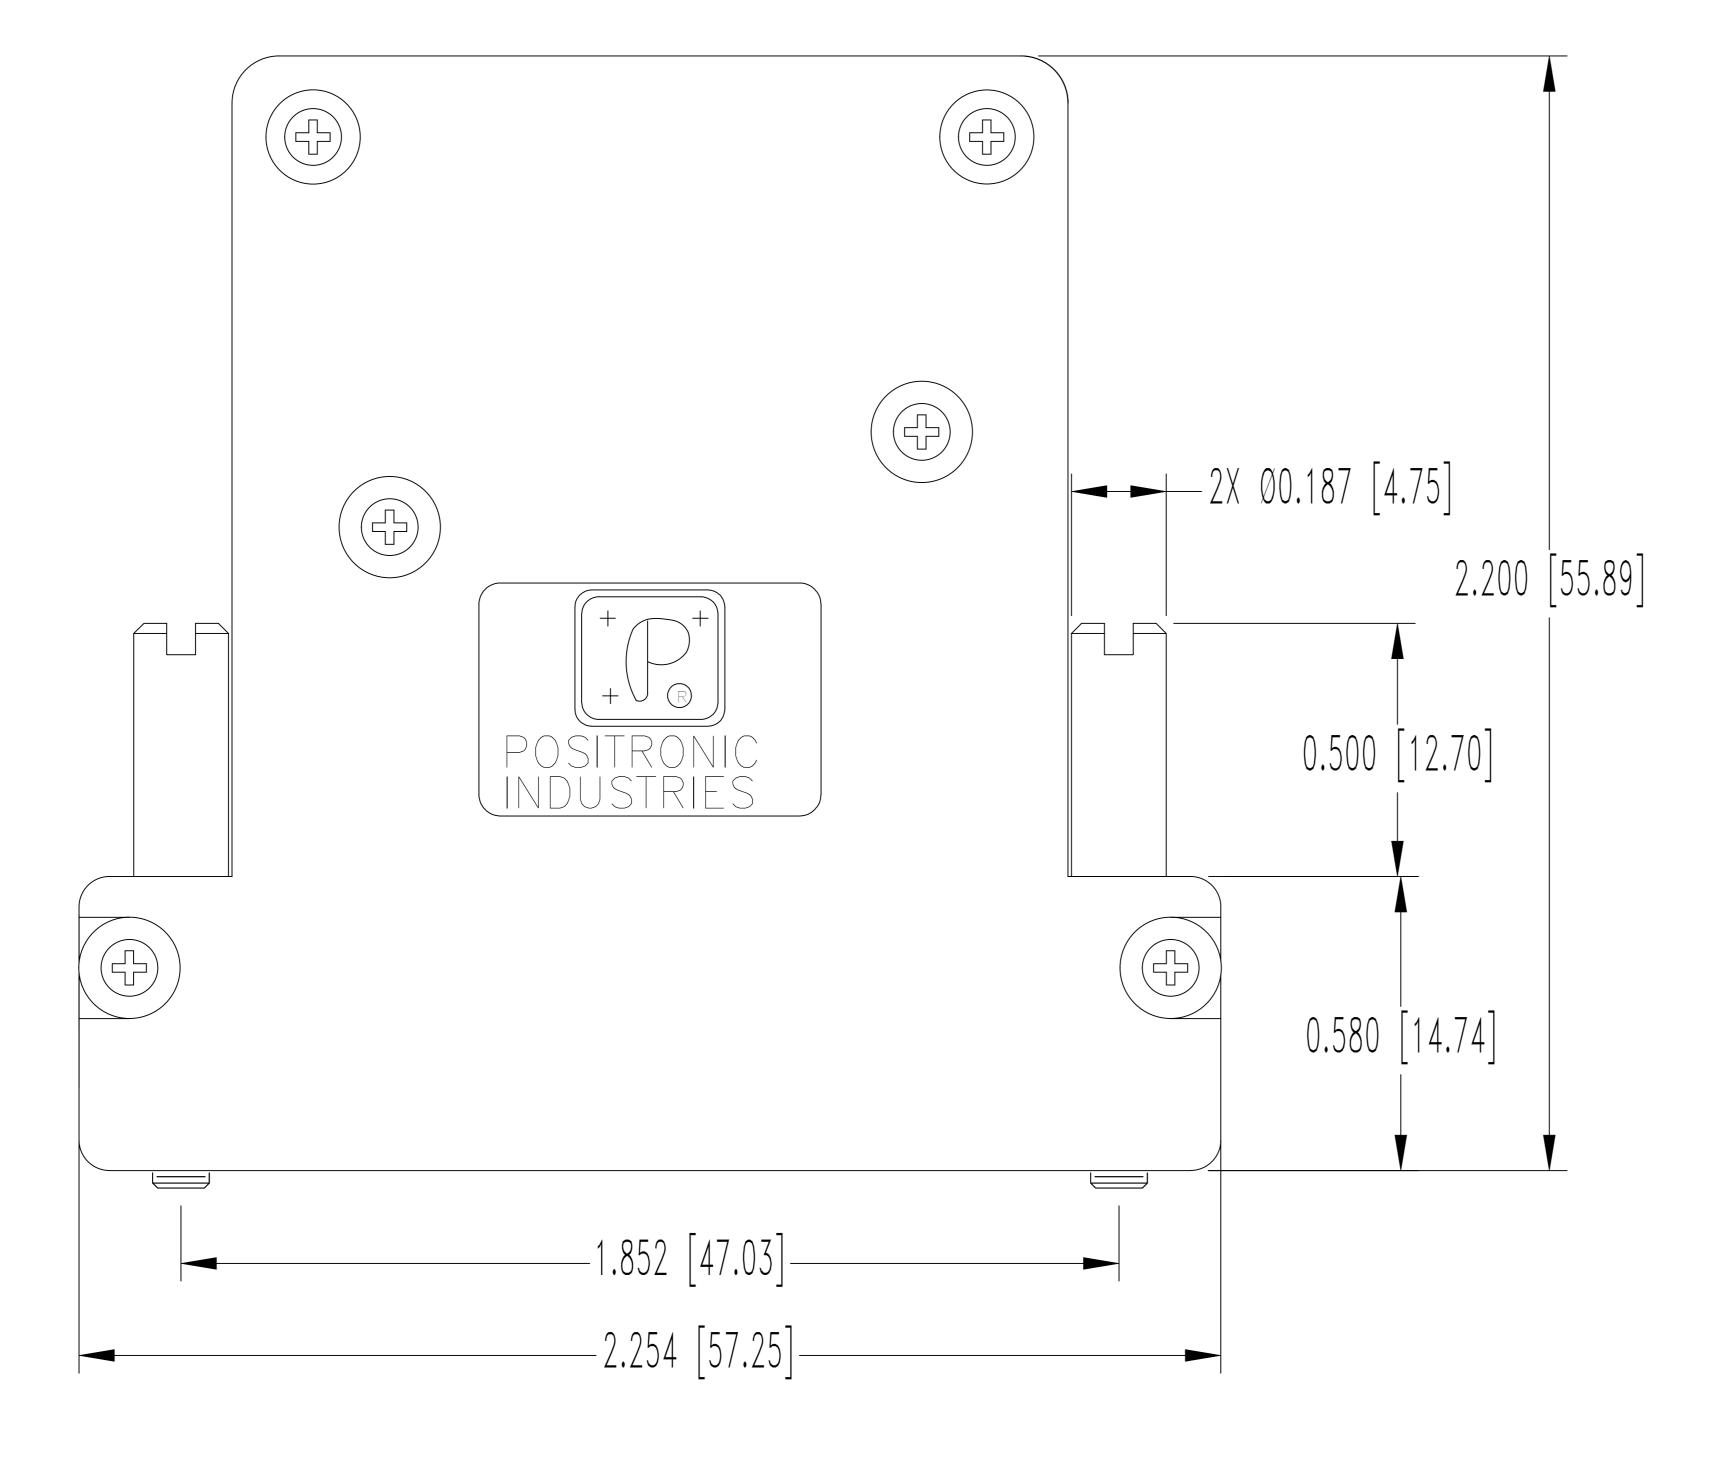

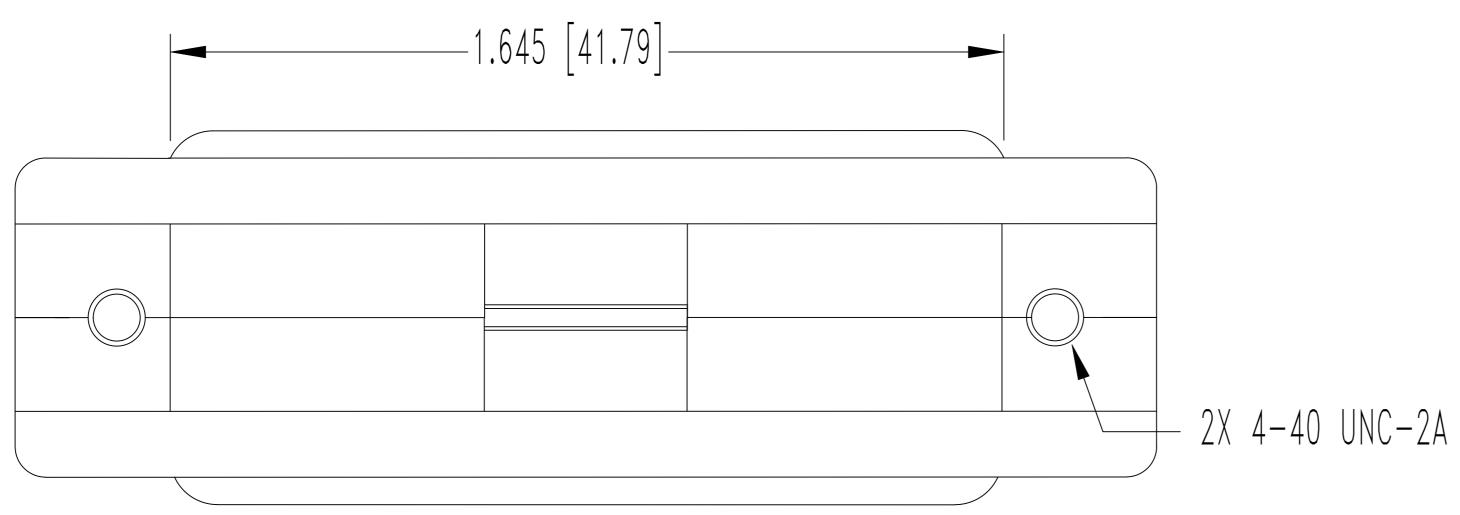

## NOTES:

- 1. MATERIAL: HOOD COMPOSITE, CONDUCTIVE VOLUME RESISTIVITY
  - (1.0 OHM-CM MAX.), UL94V-0.
  - ATTENUATION: 40+ DECIBELS.
  - JACKSCREWS: STEEL, ZINC PLATE WITH BLUE CHROMATE SEAL.
  - CABLE CLAMPS: STEÉL, NICKEL PLATE.
  - CABLE CLAMP SCREWS: BRASS, ZINC PLATE WITH CHROMATE SEAL.
  - COVER SCREWS: STAINLESS STEEL, PASSIVATED.
  - INSERT TREE: PBT(EMI), BLACK.
- 2. DETAILED PRODUCT, MECHANICAL, AND ELECTRICAL INFORMATION IS AVAILABLE IN THE LATEST D-SUB ACCESSORIES PRODUCT PUBLICATION. VISIT CONNECTPOSITRONIC.COM/PRODUCTS/58/D-SUBMINIATUREACCESSORIES OR CONNECTPOSITRONIC.COM.
- 3. CONTACTS ARE ROHS COMPLIANT PER ROHS DIRECTIVE 2002/95/EC OF JAN 2003.
- 4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

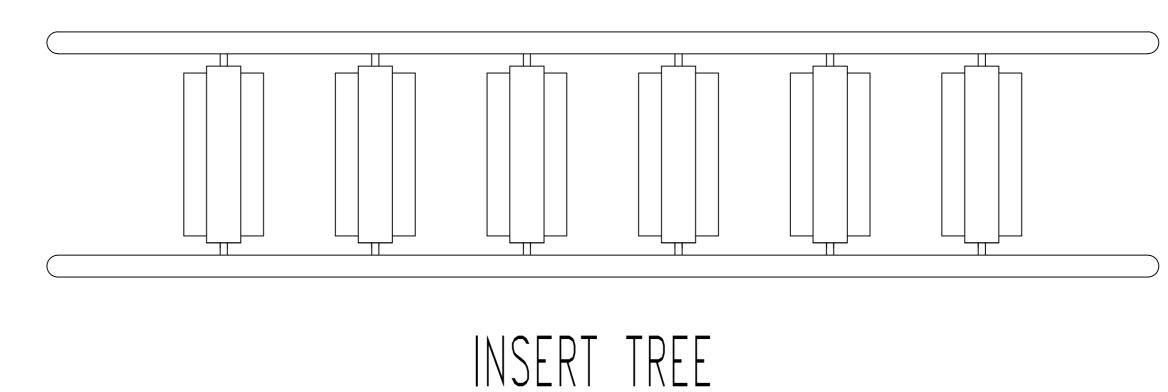

0.388 [9.86]

INSERTS COME KITTED WITH HOODS.



## POSITRONIC INDUSTRIES INC. www.connectpositronic.com

DRAWN BY N.T.S. APPROVED BY r. KEPLEY D SERIES  $^{\pm}$  0.015 [0.38]D25000Z00/AA DRAWING NUMBER  $\begin{array}{c} \text{ANGULAR TOL.} \\ \pm \, 5^{\text{o}} \end{array}$ SK6850 12-20-05