
SHT I.I

NOTE

I. INCREASED PRESSURE AT THE SOUND INLET CAUSES A POSITIVE GOING VOLTAGE TO APPEAR AT THE OUTPUT TERMINAL, RELATIVE TO THE NEGATIVE TERMINAL.

LOCATED FROM TWO SURFACES FOR CUSTOMER CONVENIENCE. ONLY APPLICABLE FROM ONE SURFACE, NOT TO BE USED TOGETHER. HORIZONTAL LOCATION FOR TERMINAL CENTERED $TO \pm 0, 17 [.007].$

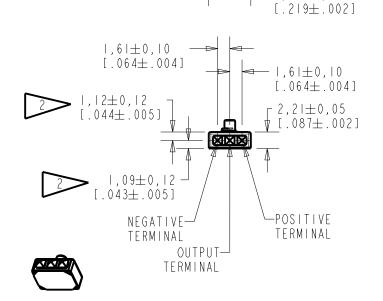

 $1,98\pm0.05$


 $[.078 \pm .002]$

 $-2,77\pm0,05$ $[.109 \pm .002]$

 -3.99 ± 0.02

 $5,56\pm0,05$

 $[.157 \pm .001]$

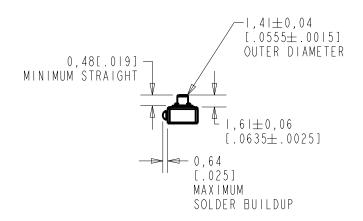


NOMINAL WEIGHT .13 GRAM

DIMENSIONS IN MILLIMETERS [INCHES]

KNOWLES ELECTRONICS ITASCA, ILLINOIS U.S.A.

Revision	C.O. #	Implementation	Date	RELEASE LEVEL		REVISION
B A	MI0105324 MI0101546	2 - I I - I 4 8 - 09 - 07		Active	В	
SCALE:		2:1			DR. BY	DATE
DO NOT SCALE DRAWING					LSY ck. by	8 - 9 - 0 7 Date
TITLE:	MIC	ROPHONE		EK-23142-000	GJP APP. BY	8 - 1 0 - 0 7
	OUTL	INE DRAWING		SHT I.I	GJP	8 - 10 - 07

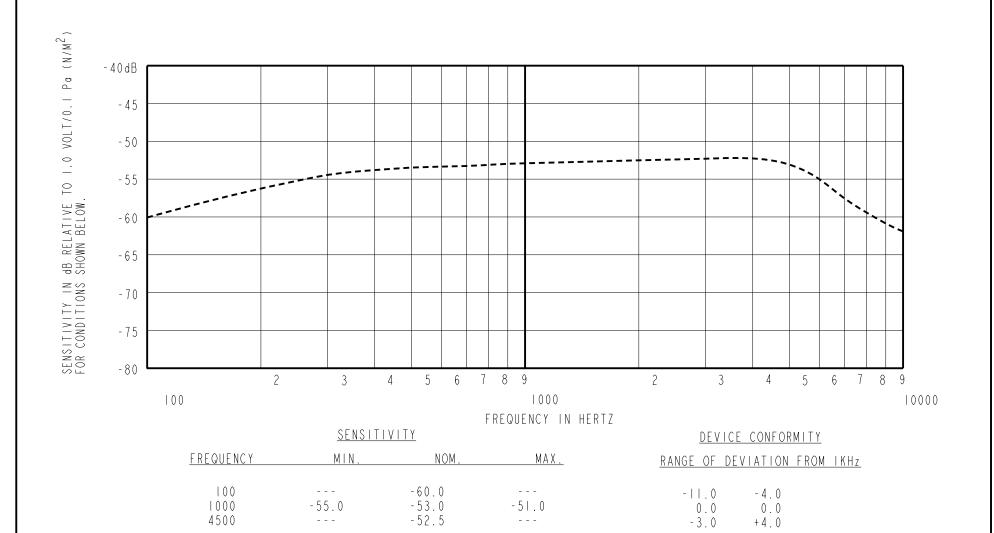

NOTES:

- I. CASE CONNECTED TO NEGATIVE TERMINAL.
- 2. MICROPHONE TO BE FUNCTIONAL WITH 10 VDC SUPPLY.
- 3. CONFORMS TO REQUIREMENTS SHOWN ON 'ELECTRET MICROPHONE ENVIRONMENTAL QUALIFICATIONS TEST, EK-PA SHEET 2.2' WITH REF. FREQ. OF 1000 Hz.
- 4. TYPICAL SENSITIVITY TO HUMIDITY AT 1000 Hz IS 0.02 dB/%RH.
- 5. SENSITIVITY AND NOISE VALUES INDICATED ON THIS SPECIFICATION ARE VALID AT 50% HUMIDITY.

PORT DC SUPPL		AMPLIFIER	SENSITIVITY CHANGE ON REDUCING SUPPLY TO 0.9VDC	"A" WEIGHTED NOISE (I kHz EQUIV. SPL)	OUTPUT IMPEDANCE OHMS		
	SUPPLY	CURRENT DRAIN			MIN.	NOM.	MAX.
0 K P	1.3V	50 μΑ MAX.	3 dB MAX.	26.0 dB MAX.	2800	4400	6800

Revision	C.O. #	Implementation Date	RELEASE LEVEL		REVISION
В	MI0105324	2 - 1 1 - 1 4	l Active		l K
Α	MI0101546	8 - 09 - 07	7		ט
WHEN TEST	LIMITS ARE US	SED TO ESTABLISH INCOMING	INSPECTION ACCEPTANCE/REJECTION	DR. BY	DATE
CRITERIA, (CORRELATION (OF TEST EQUIPMENT WITH KN	OWLES IS ALSO REQUIRED FOR	LCV	0 0 0 7

KNOWLES ELECTRONICS ITASCA, ILLINOIS U.S.A.

CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOW ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION	LSY CK. BY	8 - 9 - 0 7 DATE	
MICROPHONE	EK-23142-000	GJP APP. BY	8 - 10 - 07
PERFORMANCE SPECIFICATION	SHT 2.1	GJP	8-10-07