



Power Dividers Technical Data Sheet

PE20DV1061

Features

- 2-Way Power Divider
- High Power Wilkinson Design
- 6 to 40 GHz Frequency Range

- Max Power 20 Watts (CW)
- Insertion Loss < 1.3 dB
- Isolation > 16 dB

Applications

- Test and Measurement
- Military Communications
- Commercial Communications
- Wireless Communications
- SATCOM

Description

Pasternack carries a wide selection of power dividers to fit your needs. These components are essential in many systems, allowing the combination of multiple signals or splitting of a single signal into multiple signals with equal magnitude and phase. Pasternack's resistive and Wilkinson power dividers come with excellent performance featuring minimal loss, high isolation and low VSWR. They are available in both narrow and broad bandwidths with a variety of connector types such as 2.92mm, BNC, N and SMA.

The PE20DV1061 is a 2-way high power Wilkinson power divider that operates from 6 to 40 GHz and can handle up to 20 Watts (CW) with 1.3 dB max insertion loss and 16 dB min isolation. The package interface uses 2.92mm female connectors and is REACH and RoHS compliant.

Electrical Specifications

Design Wilkinson

Number of Output Ports

Description	Minimum	Typical	Maximum	Units
Frequency Range	6		40	GHz
Impedance		50		Ohms
Isolation		19		dB
Amplitude Balance		±0.2	±0.4	dB
Phase Balance		±3	±5	Degrees
Input Power (CW)			20	Watts
Reverse Power (CW)			0.5	Watts
Input Power (Peak)			200	Watts

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 2 Way 2.92mm Power Divider from 6 GHz to 40 GHz Rated at 20 Watts PE20DV1061

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451





Power Dividers Technical Data Sheet

PE20DV1061

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	6 to 26.5	26.5 to 40				GHz
Input VSWR, Max	1.7:1	1.6:1				
Output VSWR, Max	1.5:1	1.5:1				
Insertion Loss, Max	1	1.3		A \		dB
Isolation, Min	16	16				dB

Mechanical Specifications

 Length
 0.75 in [19.05 mm]

 Width
 1.02 in [25.91 mm]

 Height
 0.39 in [9.91 mm]

 Weight
 0.048 lbs [21.77 g]

Housing Material and Plating

Aluminum, Gold

Configuration

Package Type Connectorized
Input Connector 2.92mm Female
Output Connectors 2.92mm Female

Environmental Specifications

Temperature

Operating Range -45 to +85 deg C Storage Range -55 to +125 deg C

Humidity 100% RH at 35°C, 95% RH at 40°C

Shock
20G for 11msec half sine wave, 3 axis both directions
Vibration
25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Altitude
30,000 ft. (Epoxy Sealed Controlled environment)

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 2 Way 2.92mm Power Divider from 6 GHz to 40 GHz Rated at 20 Watts PE20DV1061







Power Dividers Technical Data Sheet

PE20DV1061

Typical Performance Data

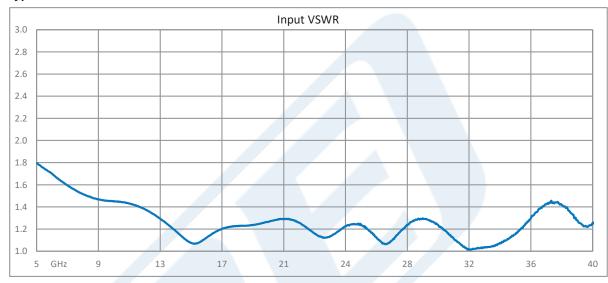

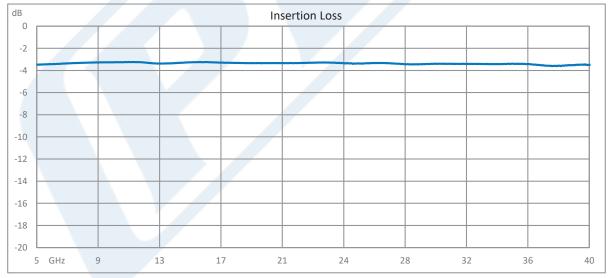


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 2 Way 2.92mm Power Divider from 6 GHz to 40 GHz Rated at 20 Watts PE20DV1061





Power Dividers Technical Data Sheet

PE20DV1061

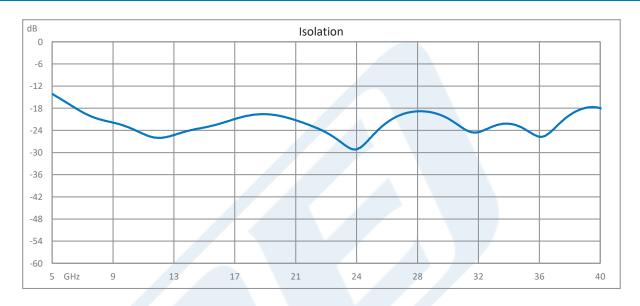

2 Way 2.92mm Power Divider from 6 GHz to 40 GHz Rated at 20 Watts from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 2 Way 2.92mm Power Divider from 6 GHz to 40 GHz Rated at 20 Watts PE20DV1061

URL: https://www.pasternack.com/2-way-2.92mm-power-divider-40-ghz-pe20dv1061-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

© 2019 Pasternack Enterprises All Rights Reserved

PE20DV1061 CAD Drawing

2 Way 2.92mm Power Divider from 6 GHz to 40 GHz Rated at 20 Watts

