

RECOMMENDED CABLE

STRIPPING DIMENSIONS

2. PACKAGING:

A. QUANTITY: SINGLE PACK B. MARKING: BAG TO BE MARKED

"AMPHENOL RF, 82-4451, AND DATE CODE"

3. CABLE ASSEMBLY INSTRUCTIONS:

A. TRIM CABLE AS SHOWN.

B. SLIDE FERRULE OVER CABLE. INSERT CABLE CENTER CONDUCTOR INTO CONTACT.

C. SOLDER OR CRIMP CONTACT TO CABLE. WHEN CRIMPING CONTACT TO CABLE, CRIMP WITH AMPHENOL TOOL 227-944 & DIE SET 227-1221-57 CAVITY 'B' OR MILITARY TOOL M22520/1-14.

D. INSERT CABLE INTO CONNECTOR WITH BRAID OVER KNURL UNTIL IT BOTTOMS.


E. CRIMP FERRULE WITH AMPHENOL TOOL 227-944 & DIE SET 227-1221-57 CAVITY 'A' OR MILITARY TOOL M22520/5-57 CLOSURE A.

MIL-C-39012 INSPECTION

--WHITE

BLUE-

4> SHOWS CABLE STRIPPING DIMENSIONS.

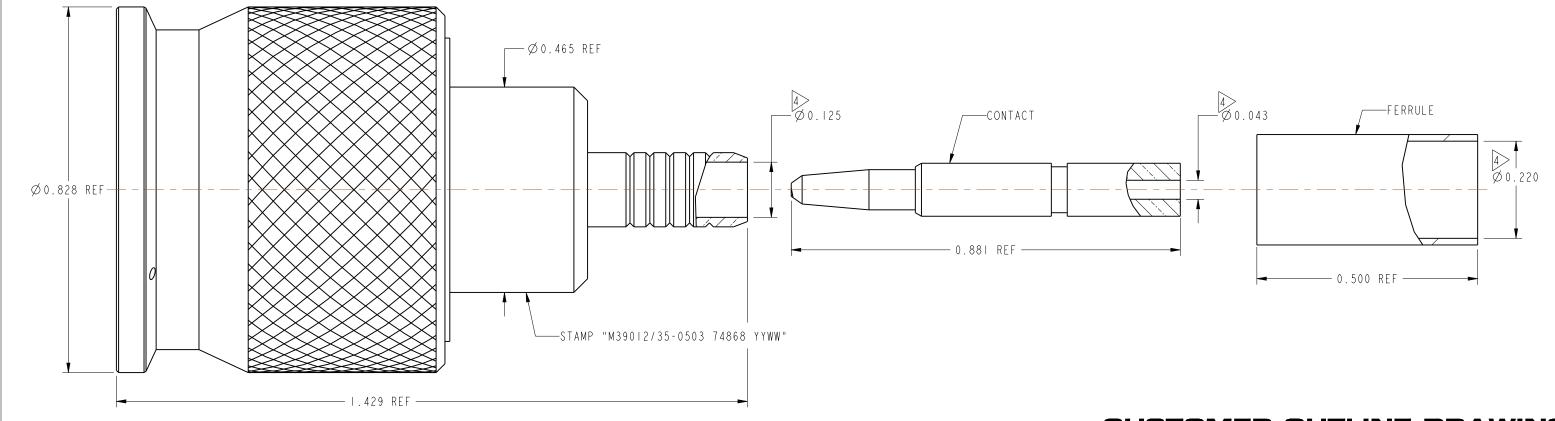

THIS CONNECTOR IS COVERED BY U.S. PATENT 3,439,294 & 3,474,391

CUSTOMER OUTLINE DRAWING ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

SCALE 1.500

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ± 0.05mm ±0.1mm ±0.2mm ± 0.3mm ±1°	MATERIAL SEE NOTES	DRAWN A ARUN PRABU	DATE 08-Jan-14	TITLE TYPE SC PLUG MIL-CRIMP	Amphenol RF
NOTICE - These drawings, specifications, or other data (I) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they	REFERENCE	ENGINEER K. CAPOZZI	DATE 08-Jan-14	(CATEGORY D) FOR RG-142B & RG 400/U CABLES	www.amphenolrf.com
are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is	EAR#	APPROVED K. CAPOZZI	DATE 08-Aug-19		DRAWING NO. 82-4451
not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be	CONFIGURATION LEVEL: In Work	CAD FILE	OO Aug 19	DWG SIZE REV	ITEM NO. 82-4451
related to or disclosed by said drawings, specifications, or other data.	FINISH			B K	PART NO. 82-4451